

BACK TO BACK BLOWOUT FIXTURES

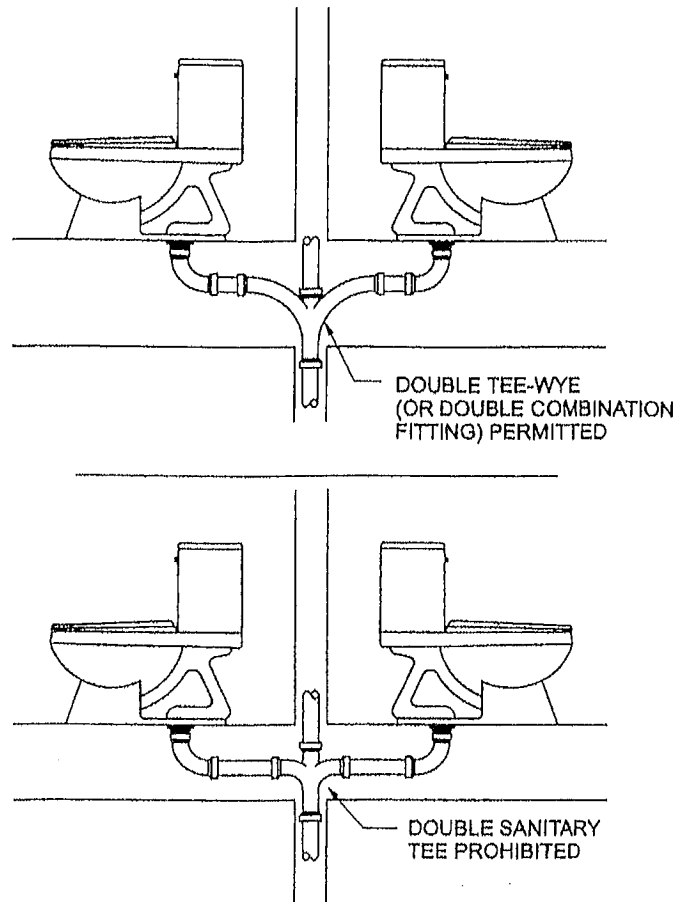


FIGURE 7.1 Back-to-back blowout fixtures. *Copyright 2002, International Code Council, Inc., Falls Church, Virginia. Reproduced with permission. All rights reserved.*

Distance between the two blowout fixtures must be 36" or more.

Offset fittings from the stack to the water closet may also be used.

BACK TO BACK BLOWOUT FIXTURES

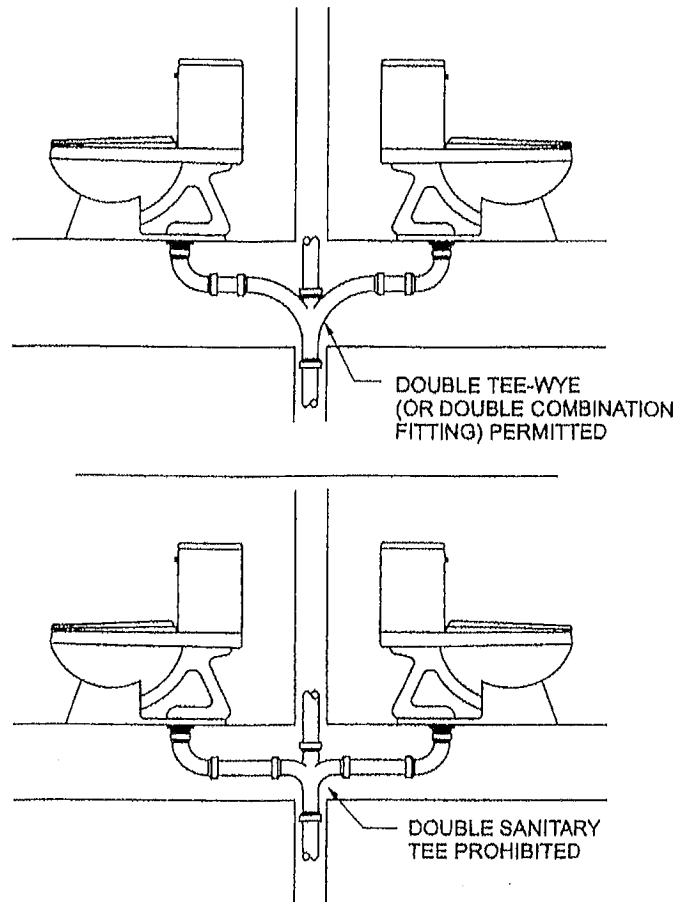


FIGURE 7.1 Back-to-back blowout fixtures. *Copyright 2002, International Code Council, Inc., Falls Church, Virginia. Reproduced with permission. All rights reserved.*

Distance between the two blowout fixtures must be 36" or more.

Offset fittings from the stack to the water closet may also be used.