BACK TO BACK PRESSURIZED TOILETS


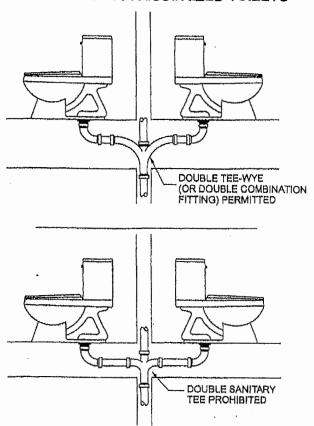


FIGURE 7.1 Back-to-back blowout fixtures. Copyright 2002, International Gode Council, Inc., Falls Church, Virginia. Reproduced with permission. All rights reserved.

Distance between the two pressurized toilets must be 36" apart or more

Offset fittings from the ProVent stack to the water closets may also be used.



ProVent Stack with W.C. offsets is permitted for 36" spacing or more

The same W.C. offset applies when other fixtures connect to the opposite side of the W.C.