


PROSEAL PLUG DEVICE

CORED HOLE THROUGH CORRUGATED METAL DECK
FOR FLOORS

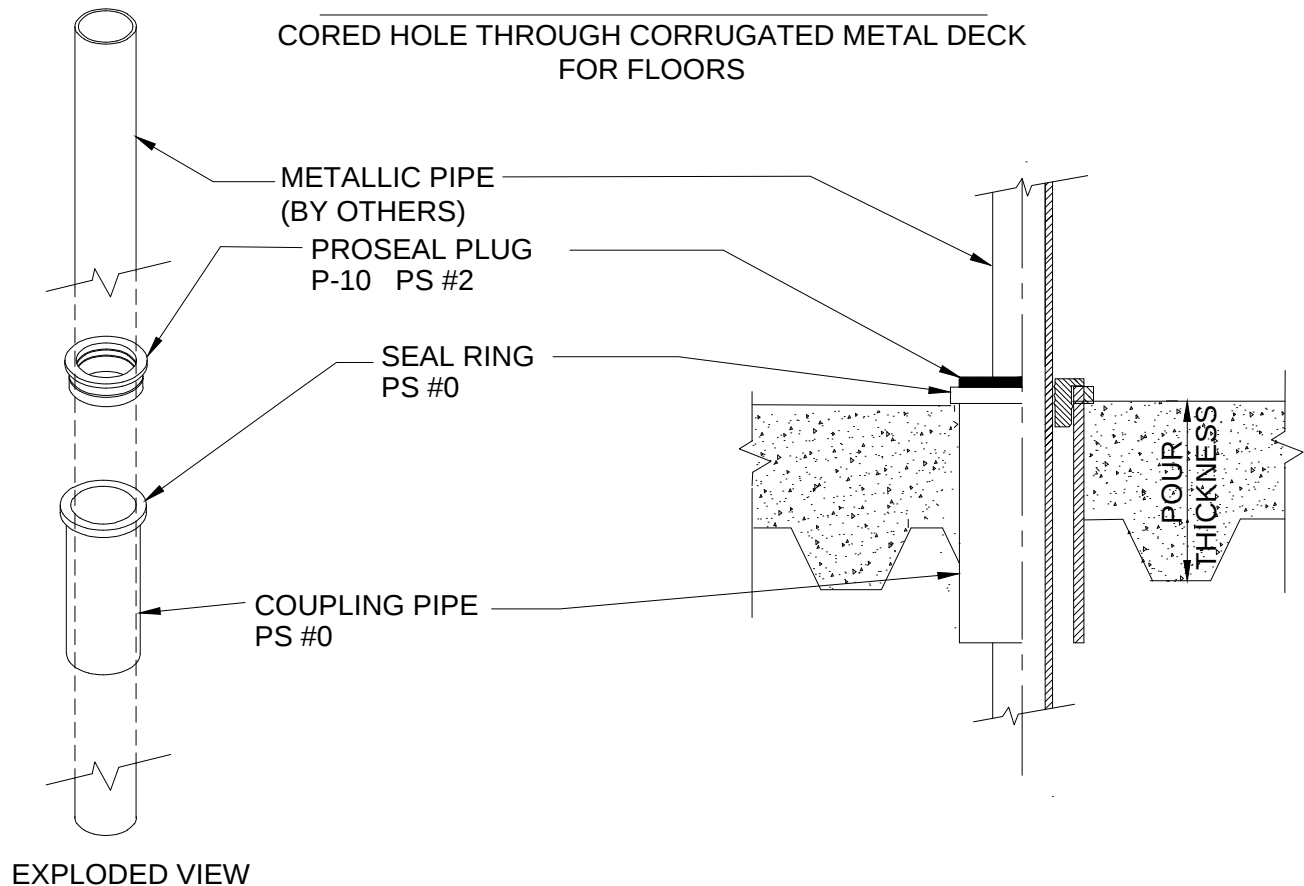

Size	Part No.	Description	Price	Unit Total	Core Size
1/2"	P2543H-G-CH C20012	Sleeve Coupling 2"x 1/2" ProSeal Plug	4.10 2.40	6.50	2 3/4"
3/4"	P2543H-G-CH C20034	Sleeve Coupling 2"x 3/4" ProSeal Plug	4.10 2.40	6.50	2 3/4"
1"	P2543H-G-CH C20100	Sleeve Coupling 2"x 1" ProSeal Plug	4.10 2.40	6.50	2 3/4"
1 1/4"	P2543H-G-CH C20114	Sleeve Coupling 2"x 1 1/4" ProSeal Plug	4.10 2.40	6.50	2 3/4"
1 1/2"	P2543H-G-CH C20112	Sleeve Coupling 2"x 1 1/2" ProSeal Plug	4.10 2.40	6.50	2 3/4"

IMPORTANT: The new non-migrating "WHITE" plug must be used - not the black



W.H. Directory Reference 97 Edition
Firestop Device
W.H. Design No. PS/PHV 120-03
F Rating 2 Hr. or 3 Hrs. or 4 Hrs.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :
10-12-15
DRG . NO .
A-1010-CX