


PROSEAL PLUG DEVICE

FOR 2 HR. GYPSUM WALLS

IMPORTANT PROTECTION

When using pressure type CPVC or PVC use the White ProSeal Plugs only.

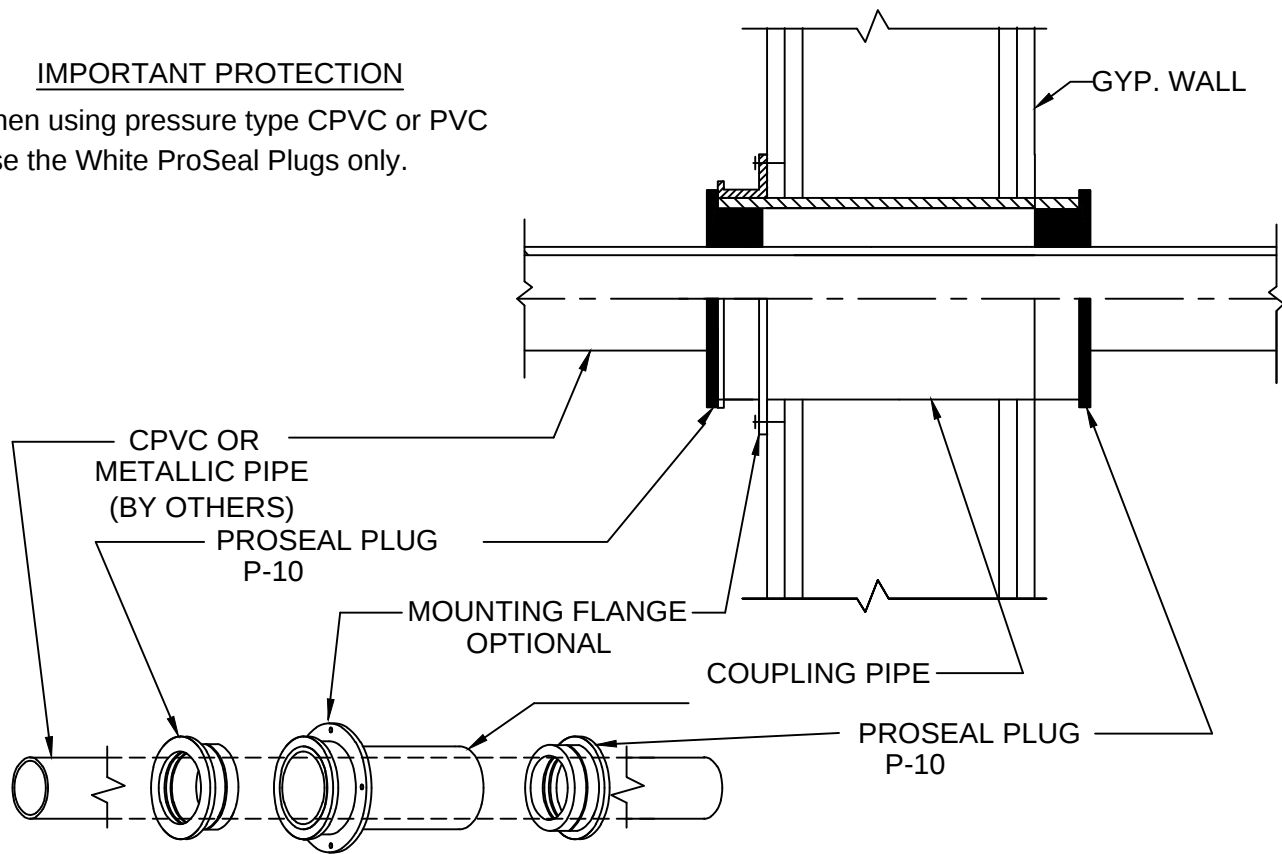

Size	Part No.	Description	Price	Unit Total
1/2"	P2543H-B-GW C20012 (2)	Sleeve Coupling 2"x1/2" ProSeal Plug	6.95 5.30	12.25
3/4"	P2543H-B-GW C20034 (2)	Sleeve Coupling 2"x3/4" ProSeal Plug	6.95 5.30	12.25
1"	P2543H-B-GW C20100 (2)	Sleeve coupling 2"x1" ProSeal Plug	6.95 5.30	12.25
1 1/4"	P2543H-B-GW C20114 (2)	Sleeve Coupling 2"x1 1/4" ProSeal Plug	6.95 5.30	12.25
1 1/2"	P2543H-B-GW C20112 (2)	Sleeve Coupling 2"x1 1/2" ProSeal Plug	6.95 5.30	12.25

Add approximately .35 each to above for bulk F10450 Firefill Material.



W.H. Directory Reference 99 Edition
Firestop Device
W.H. Design No. PS/PV 120-01
F Rating 2 Hrs.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :
8-01-18
DRG . NO .
A-1013-F