


# PROSEAL PLUG DEVICE

CONCRETE ON WOOD FORM  
FOR FLOORS OR WALLS

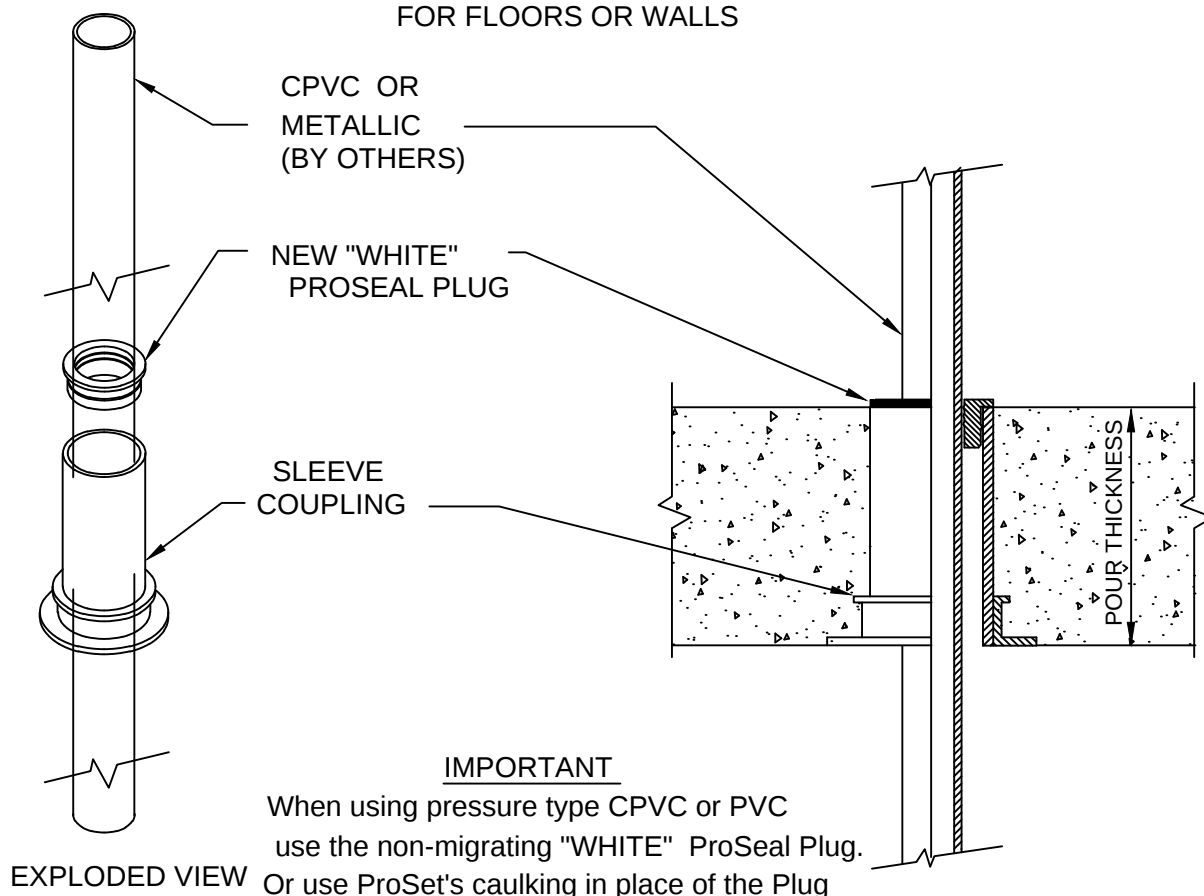

EXPLODED VIEW

**IMPORTANT**  
When using pressure type CPVC or PVC  
use the non-migrating "WHITE" ProSeal Plug.  
Or use ProSet's caulking in place of the Plug

| Size   | Part No.           | Description                                     | Price        | Unit<br>Total |
|--------|--------------------|-------------------------------------------------|--------------|---------------|
| 1/2"   | P2543H-G<br>C20012 | Sleeve Coupling<br>2"x1/2" White ProSeal Plug   | 6.50<br>2.65 | 9.15          |
| 3/4"   | P2543H-G<br>C20034 | Sleeve Coupling<br>2"x3/4" White ProSeal Plug   | 6.50<br>2.65 | 9.15          |
| 1"     | P2543H-G<br>C20100 | Sleeve Coupling<br>2"x1" White ProSeal Plug     | 6.50<br>2.65 | 9.15          |
| 1 1/4" | P2543H-G<br>C20114 | Sleeve Coupling<br>2"x1 1/4" White ProSeal Plug | 6.50<br>2.65 | 9.15          |
| 1 1/2" | P2543H-G<br>C20112 | Sleeve Coupling<br>2"x1 1/2" White ProSeal Plug | 6.50<br>2.60 | 9.15          |

**IMPORTANT:** The new non-migrating "WHITE" plug must be used - not the black

W.H. Directory Reference 99 Edition  
Firestop Device  
W.H. Design No. PS/PHV 120-04  
F Rating 2 Hrs.



**PROSET**<sup>®</sup>  
**SYSTEMS**  
FIRESTOP PENETRATOR™

DATE :  
8-01-18

DRG . NO .  
A-1011-A