


# TRAP GUARD SHOWER/FLOOR DRAIN ASSEMBLY

FOR CORED HOLES THROUGH CONCRETE FLOORS

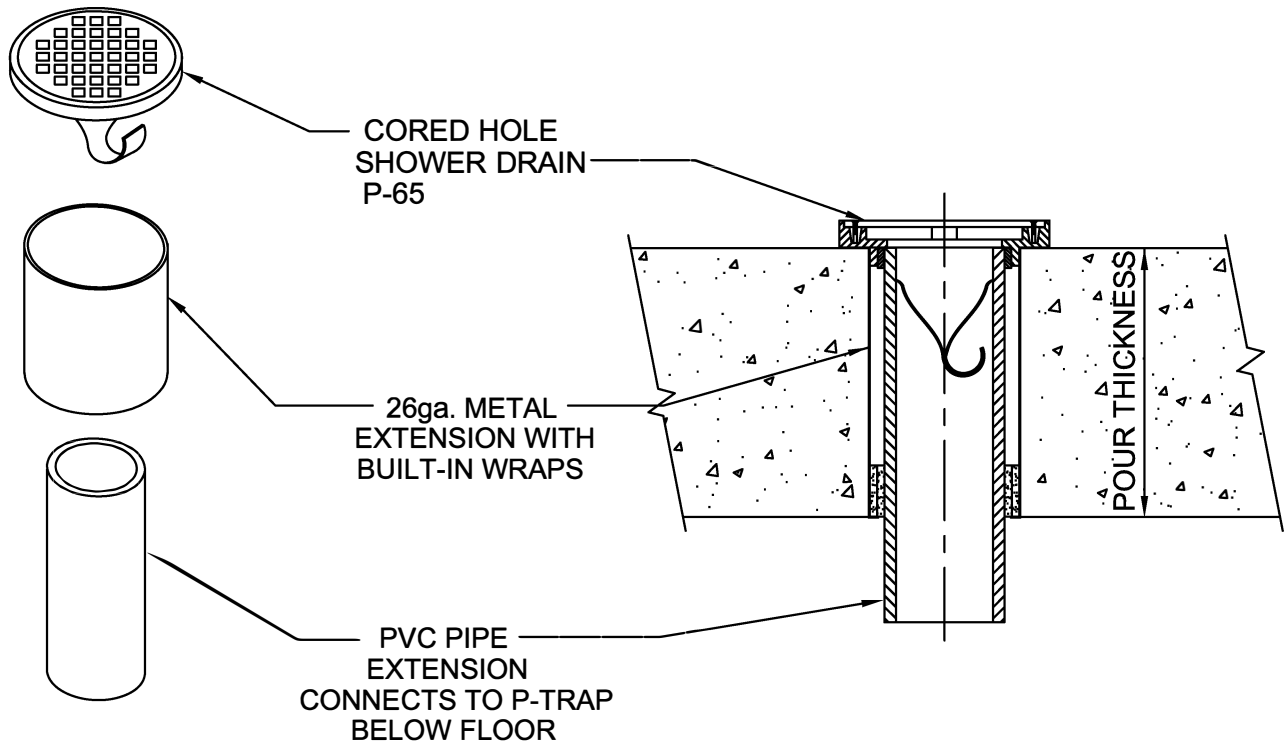

CORED HOLE DRILL SIZES: 3" HOLE FOR 2"PIPE - 4 1/2" FOR 3" PIPE- 6" FOR 4"PIPE

## IMPORTANT NOTES:

1. Core hole through the floor to fit the sleeve. (See sizes above)
2. Insert the floor drain into hole and mark around the diameter of the drain top.
3. \* Chip concrete down low enough to fit top or pour 1" additional concrete in the room its draining.
4. Use ProSets waterproof caulking under drain top before patching in around the drain.
5. Connect the branch pipe and trap to the floor drain stub to complete the job.

\* Other drain type options can be used such as snap-in strainers when there is no strainer loads.



W.H. Directory Reference 01 Edition  
Firestop Device  
W.H. Design No. PS/PHV 180-03  
F Rating 3 Hrs.



**PROSET**<sup>®</sup>  
**SYSTEMS**  
FIRESTOP PENETRATOR™

DATE :  
5-31-21  
DRG . NO .  
C-6331-DTG