
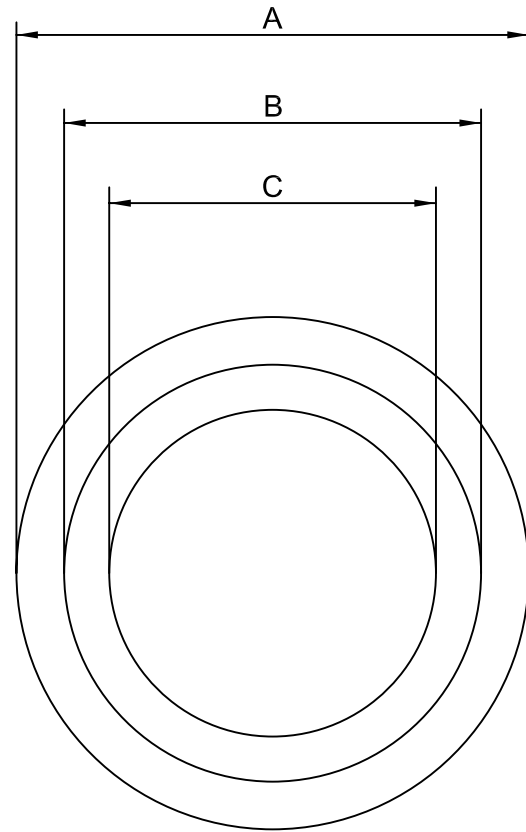


SERIES 43-CH COUPLING

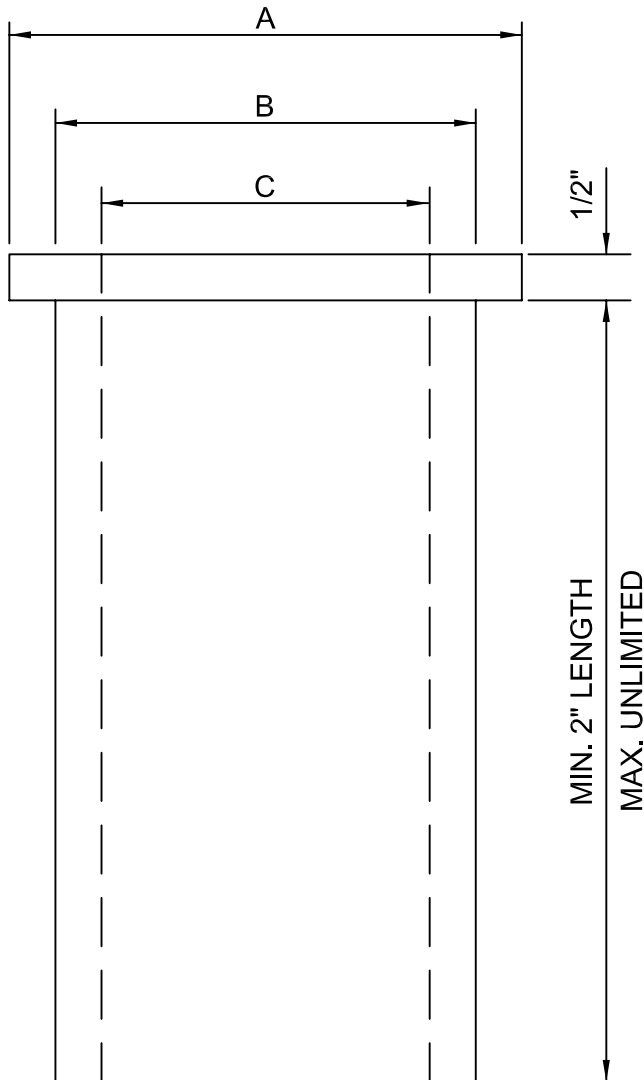

COMPOUND STANDARDS
SCH. 40 PVC - ASTM D-2665
FLAME SPREAD RATING
18 OR LESS - ASTM E84

			RED	BLK	GRN
SIZE	A	B	C	C	C
2"	3.38"	2.75"	2.40"	2.46"	2.42"
3"	4.63"	4.00"	3.52"	3.68"	3.55"
4"	5.63"	5.00"	4.52"	4.60"	4.55"
6"	8.25"	7.25"	6.65"	6.80"	-

FUNCTION OF COMPONENT

* Used as a fire rated sleeve through cored holes becomes an integral part of a plumbing fixture opening or stack thru concrete floors and walls.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :

1-10-06

DRG . NO .

P 43-CH