
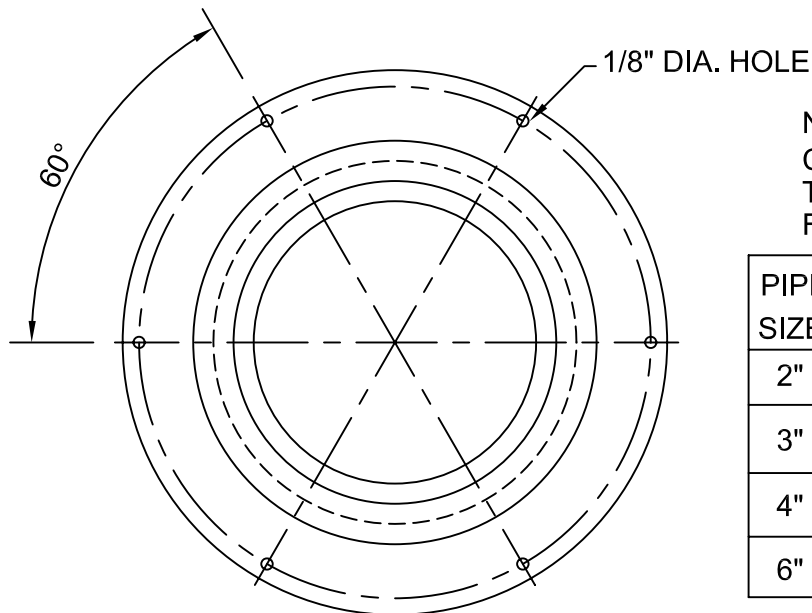


# SERIES 43 COUPLING

FOR CORRUGATED METAL DECKS

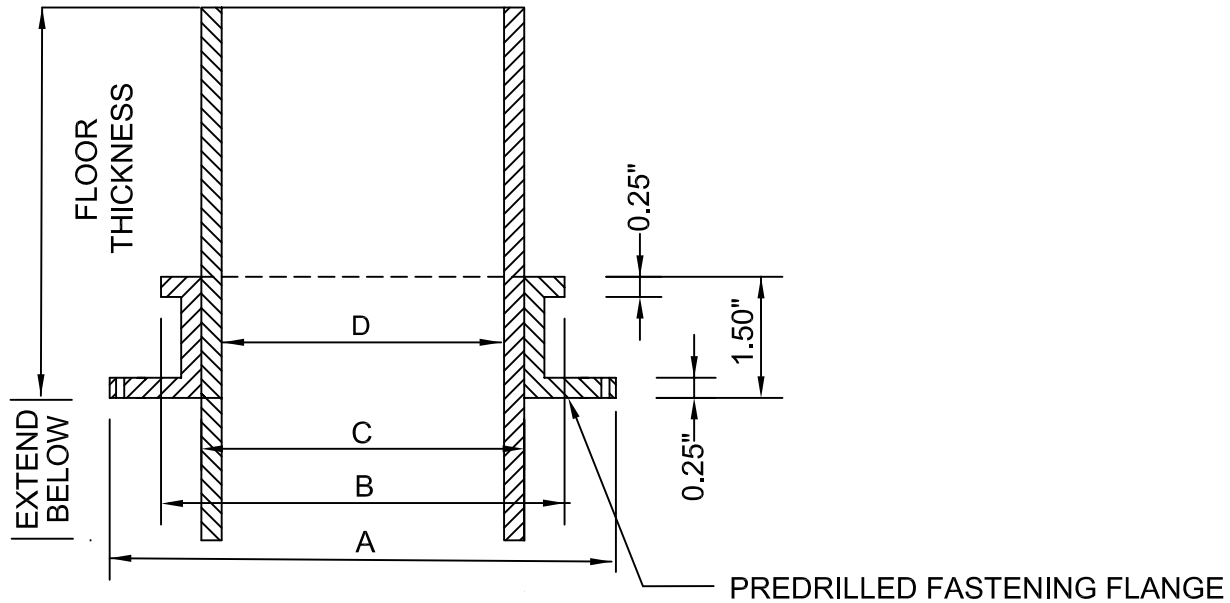

## NOTE:

Components are constructed of  
Type 1 fire rated PVC resin.  
Flame spread rating 20 or less.

| PIPE<br>SIZE | DIMENSIONS (IN INCHES) |      |      |      |
|--------------|------------------------|------|------|------|
|              | A                      | B    | C    | D    |
| 2"           | 5.00                   | 3.75 | 2.75 | 2.40 |
| 3"           | 6.27                   | 5.02 | 4.02 | 3.52 |
| 4"           | 7.25                   | 6.00 | 5.00 | 4.52 |
| 6"           | 9.52                   | 8.27 | 7.27 | 6.65 |

## FUNCTION OF COMPONENT

\* Used as a fire rated sleeve or becomes an integral part of a plumbing fixture opening or stack thru concrete floors on corrugated decks.



**PROSET**<sup>®</sup>  
**SYSTEMS**  
FIRESTOP PENETRATOR™

DATE :

1-10-10

DRG . NO .

P -43 EX