
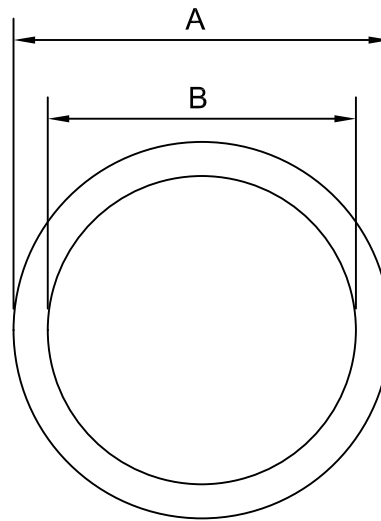


HI-TEMP FIRE RATED SCH. 40 PVC PIPE

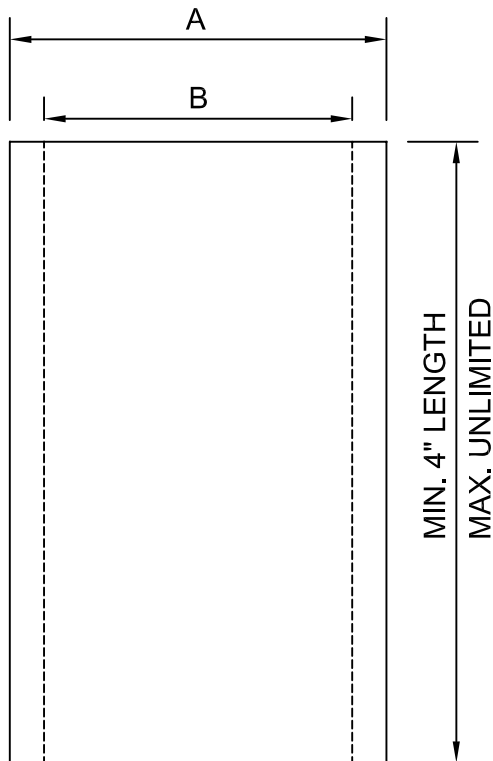

COMPOUND STANDARDS
SCH. 40 CPVC - ASTM F441

FLAME SPREAD RATING
18 OR LESS - ASTM E84

SIZE	A	B	MIN. WALL
1-1/2"	1.900	1.476	.20
2"	2.375	2.050	.154
3"	3.50	3.070	.216
4"	4.50	4.030	.237
6"	6.625	5.709	.432

FUNCTION OF COMPONENT

* Used through floor/ceiling assemblies or poke outs through fire rated walls.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :

4-7-97

DRG . NO .

P - 90