



CODE RED HARNESS

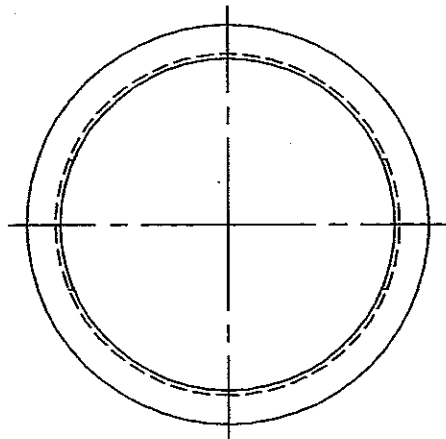


TOP VIEW

MATERIAL:
POLYETHYLENE, DOW 2517

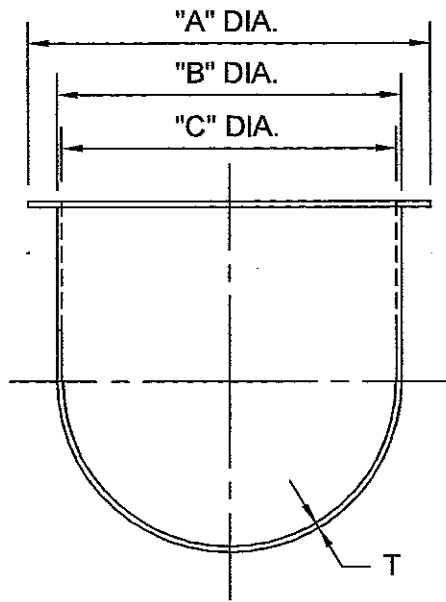

FRONT VIEW

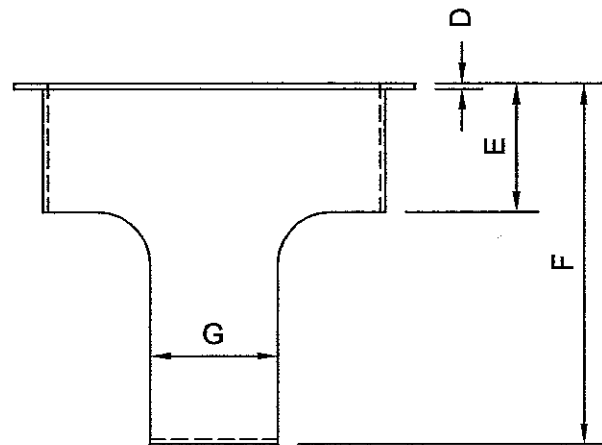

SIDE VIEW

SIZE	A	B	C	D	E	F	G	T
1-1/2"	2.180	1.750	1.650	.055	5/8	1-3/4	5/8	.052
2"	2-19/32	2-7/32	2-7/64	.055	3/4	2-1/2	3/4	.052
3"	3-7/8	3-5/16	3-7/32	.055	1-1/4	3-1/2	1-1/4	.052
4"	4-31/32	4-11/32	4-15/64	.055	1-1/2	4-1/2	1-1/2	.052
6"	7-7/32	6-17/32	6-3/8	.055	2	6-3/8	2-1/2	.052

FUNCTION OF COMPONENT

* The temperature sensitive harness melts out at 230 degrees F and releases the cast iron fire plug into the Code Red fitting.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE:

3-1-92

DRG. NO.

P-94