


TRAP GUARD WOOD FLOOR HUB/FLOOR DRAIN

CAN BE USED WITH OR WITHOUT GYPCRETE FLOORS

STRAINER W/ OPTIONAL 3/4" CPVC OPENING FOR CONDENSATE OR RELIEF VALVE DRAIN LINE

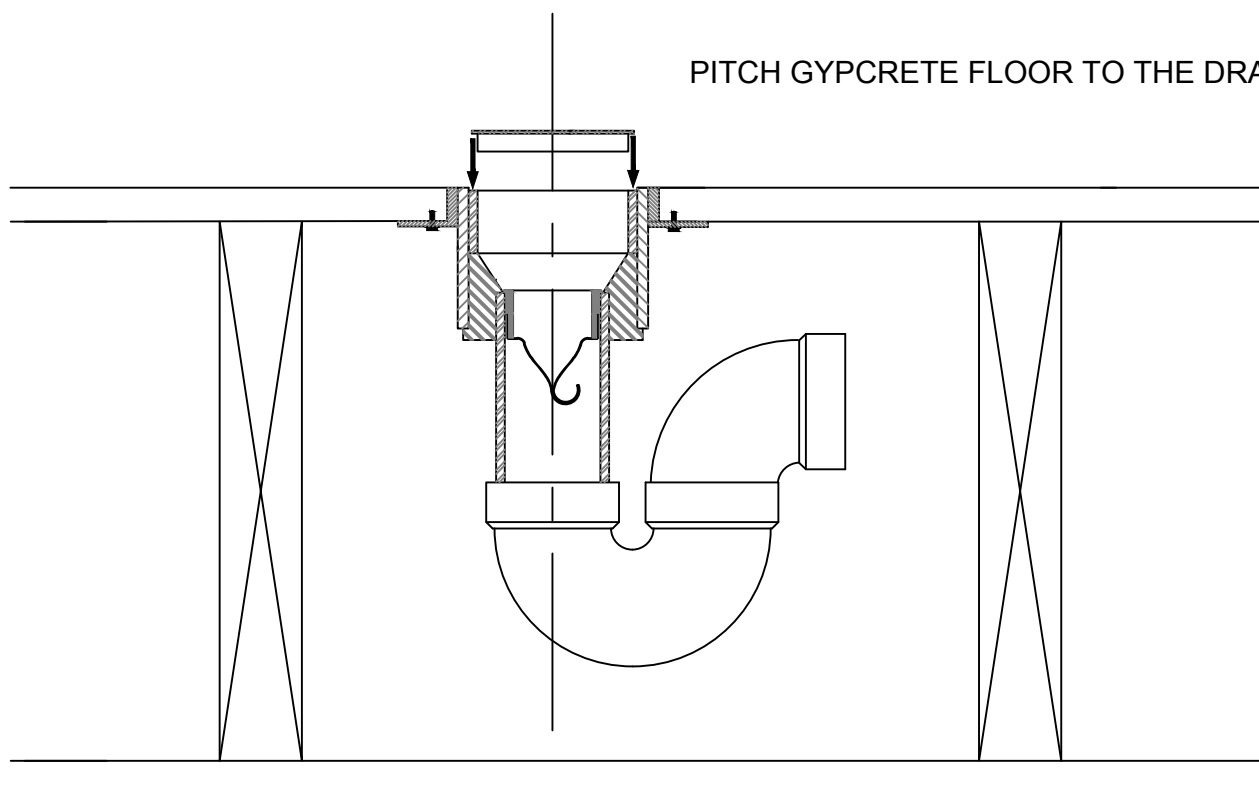

MOUNT FLANGE FROM THE TOP WITH GYPCRETE FROM THE BOTTOM WITHOUT
USE T-3SO STRAINER WHEN DISCHARGING A RELIEF VALVE INTO THE HUB DRAIN

SIZE	PART NO.	DESCRIPTION	PRICE
2" x 3"	TG23-FBHD	2" X 3" Hub Drain	\$ 47.20
2" x 3"	TG23-FBHD-S	2" X 3" Hub Drain w/ flush strainer	\$ 51.45
2" x 3"	TG23-FBHD-RS	2" X 3" Hub Drain w/ 1-1/4" recessed strainer	\$ 51.45

THE MOUNTING FLANGE COMES LOOSE (NOT GLUED) WHEN MOUNTED UNDER FLOOR
FOR FIELD ADJUSTMENTS

MAINTENANCE INSTRUCTIONS:

The Trap Guard device should be inspected periodically for build up of any type debris.
The device should then can be flushed out thoughly with clear warm water.



W.H. Directory Reference 99 Edition
Firestop Device

W.H. Design No. PS/PH 120-06

When passing through a fire rated floor ceiling assembly



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :
05-31-21

DRG . NO .
C-6331-EBTGp