


# PROSEAL PLUG DEVICE

CONCRETE ON CORRUGATED METAL DECK  
FOR FLOORS

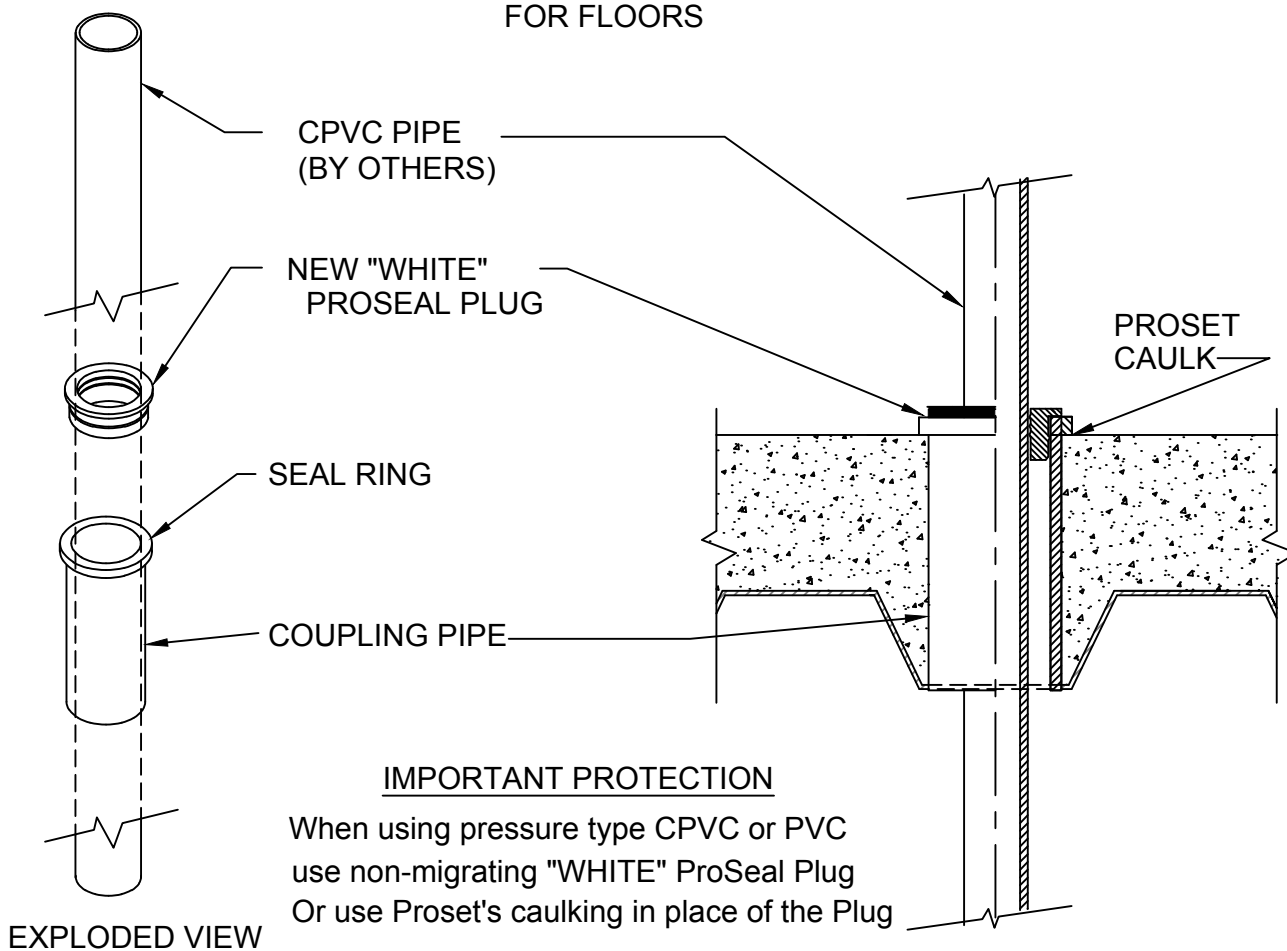

## IMPORTANT PROTECTION

When using pressure type CPVC or PVC  
use non-migrating "WHITE" ProSeal Plug  
Or use Proset's caulking in place of the Plug

Size	Part No.	Description	Price	Unit Total	Core Size
1/2"	P2543H-G-CH C20012	Sleeve Coupling	4.50	7.15	2 3/4"
		2"x 1/2" ProSeal Plug	2.65		
3/4"	P2543H-G-CH C20034	Sleeve Coupling	4.50	7.15	2 3/4"
		2"x 3/4" ProSeal Plug	2.65		
1"	P2543H-G-CH C20100	Sleeve Coupling	4.50	7.15	2 3/4"
		2"x 1" ProSeal Plug	2.65		
1 1/4"	P2543H-G-CH C20114	Sleeve Coupling	4.50	7.15	2 3/4"
		2"x 1 1/4" ProSeal Plug	2.65		
1 1/2"	P2543H-G-CH C20112	Sleeve Coupling	4.50	7.15	2 3/4"
		2"x 1 1/2" ProSeal Plug	2.65		

IMPORTANT: The new non-migrating "WHITE" plug must be used - not the black



W.H. Directory Reference 99 Edition  
Firestop Device  
W.H. Design No. PS/PHV 120-04  
F Rating 2 Hrs.



**PROSET**<sup>®</sup>  
**SYSTEMS**  
FIRESTOP PENETRATOR™

DATE :  
02-22-19

DRG . NO .  
A-1011-DC