


# PROSEAL PLUG DEVICE

FOR BLOCK/BRICK WALLS

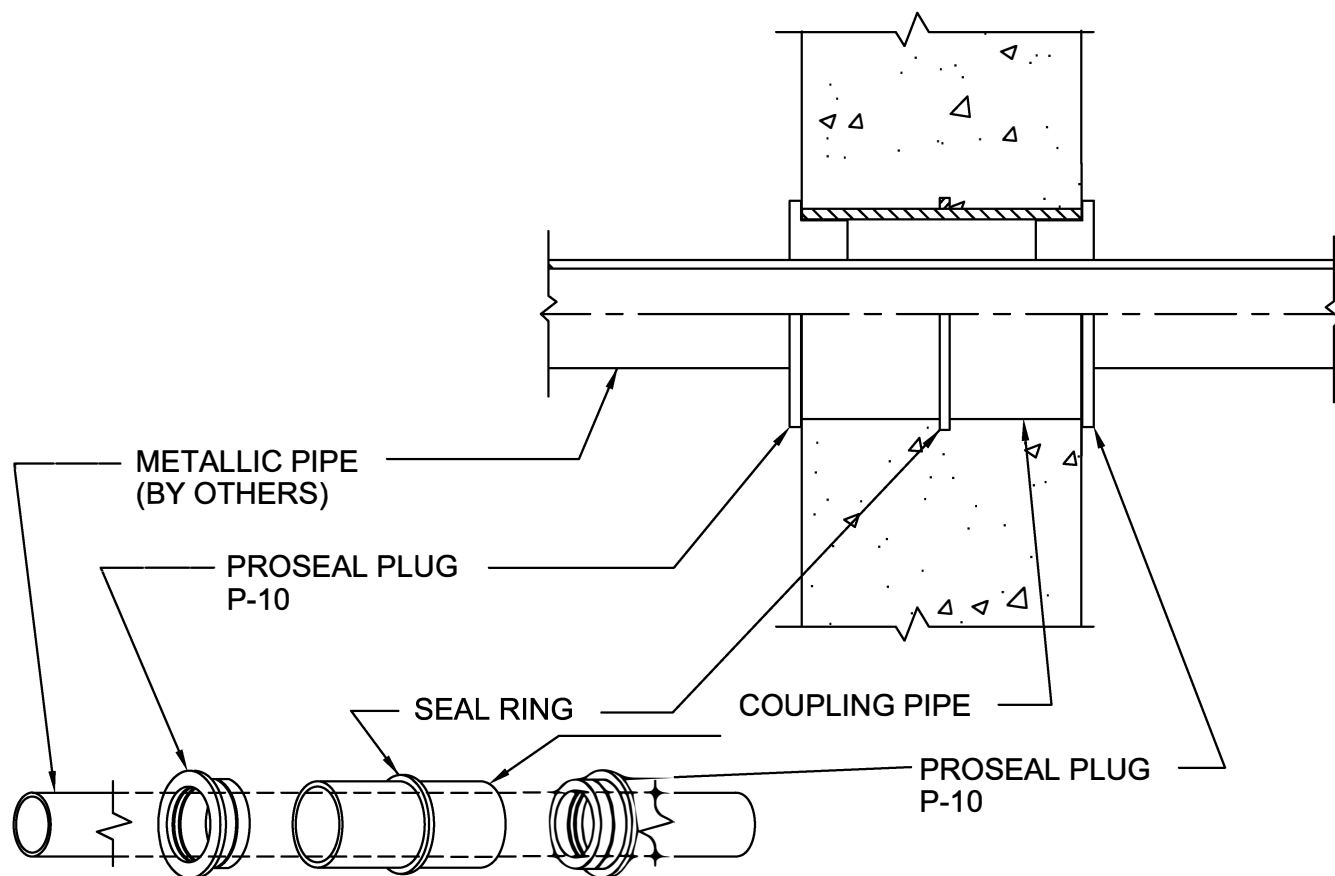

| Size   | Part No.                  | Description            | Price | Unit Total |
|--------|---------------------------|------------------------|-------|------------|
| 1/2"   | P2543H-B-MW<br>C20012 (2) | Sleeve Coupling        | 5.05  | 10.95      |
|        |                           | 2"x1/2" ProSeal Plug   | 5.90  |            |
| 3/4"   | P2543H-B-MW<br>C20034 (2) | Sleeve Coupling        | 5.05  | 10.95      |
|        |                           | 2"x3/4" ProSeal Plug   | 5.90  |            |
| 1"     | P2543H-B-MW<br>C20100 (2) | Sleeve Coupling        | 5.05  | 10.95      |
|        |                           | 2"x1" ProSeal Plug     | 5.90  |            |
| 1 1/4" | P2543H-B-MW<br>C20114 (2) | Sleeve Coupling        | 5.05  | 10.95      |
|        |                           | 2"x1 1/4" ProSeal Plug | 5.90  |            |
| 1 1/2" | P2543H-B-MW<br>C20112 (2) | Sleeve Coupling        | 5.05  | 10.95      |
|        |                           | 2"x1 1/2" ProSeal Plug | 5.90  |            |

For a 3-Hr. or 4-Hr. F Rating, add approximately .35 each to above for bulk F10450 Firefill Material.



W.H. Directory Reference 97 Edition  
Firestop Device  
W.H. Design No. PS/PHV 120-03  
F Rating 2 Hr. or 3 Hrs. or 4 Hrs.



**PROSET**<sup>®</sup>  
**SYSTEMS**  
FIRESTOP PENETRATOR™

DATE :  
05/10/24  
DRG . NO .  
A-1010-G