


PROSEAL PLUG DEVICE

CONCRETE ON CORRUGATED METAL DECK
FOR FLOORS

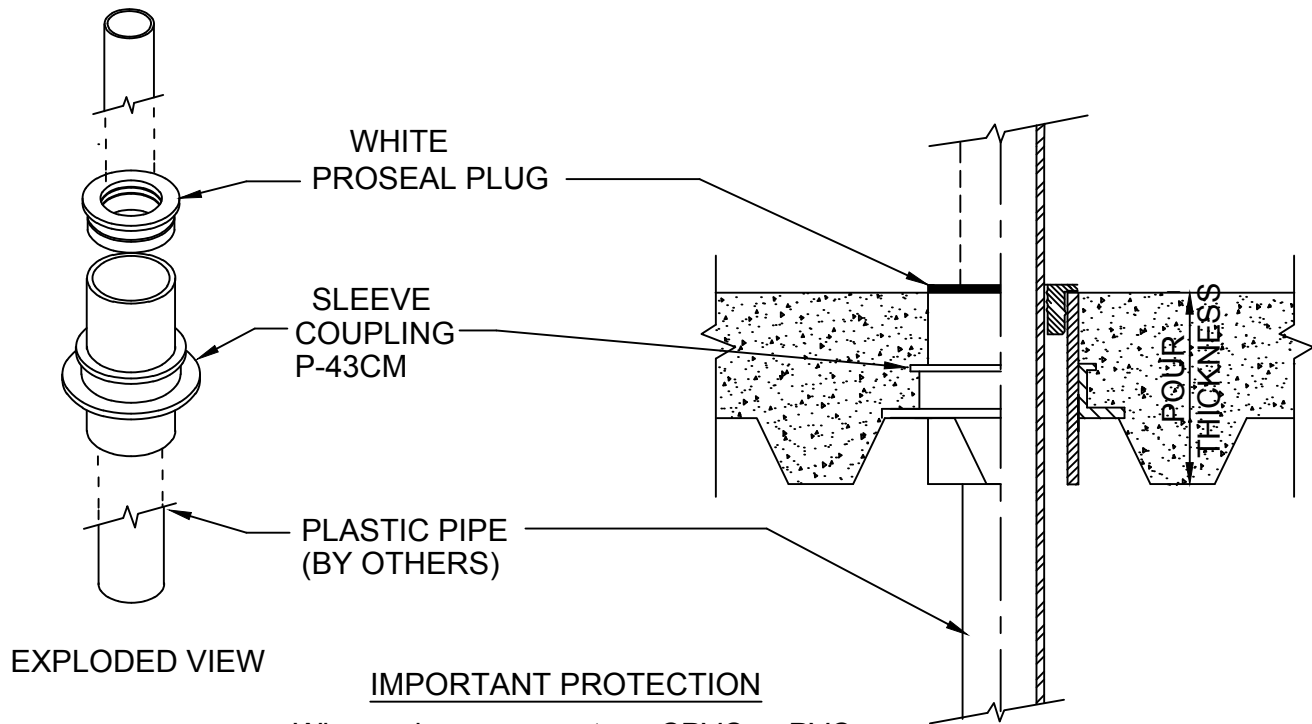

IMPORTANT PROTECTION

When using pressure type CPVC or PVC
use the non-migrating "WHITE" ProSeal Plug
Or use ProSet's caulking in place of the plug

Size	Part No.	Description	Price	Unit Total
1/2"	P2543H-G-CM C20012	Sleeve Coupling 2"x1/2" ProSeal Plug	7.15 2.95	10.10
3/4"	P2543H-G-CM C20034	Sleeve Coupling 2"x3/4" ProSeal Plug	7.15 2.95	10.10
1"	P2543H-G-CM C20100	Sleeve Coupling 2"x1" ProSeal Plug	7.15 2.95	10.10
1 1/4"	P2543H-G-CM C20114	Sleeve Coupling 2"x1 1/4" ProSeal Plug	7.15 2.95	10.10
1 1/2"	P2543H-G-CM C20112	Sleeve Coupling 2"x1 1/2" ProSeal Plug	7.15 2.95	10.10

IMPORTANT: The new non-migrating "WHITE" plug must be used - not the black



W.H. Directory Reference 97 Edition
Firestop Device
W.H. Design No. PS/PHV 120-04
F Rating 2 Hrs.



PROSET[®]
SYSTEMS
FIRESTOP PENETRATOR™

DATE :
05-10-24

DRG . NO .
A-1011-C